

14 (0.6")
±67-80
(2.6-3.1")



75 (3")
±125-140
(4.9-5.5")

approx 2kg (4.5lb)

PENDANTS: one
MOUNTING: brass mounting plate 75mm (3") in diameter
LAMPING: 1.5w LED (2500K or 3500K)
INSTALLATION: threaded on - wall or ceiling mount
MATERIALS: blown glass, copper mesh, electrical components, silicon gasket, brass mounting plate
WEIGHT: approximately 2kg (4.5lb)
POWER SUPPLIES: remote mounted. Power supplies included

DESCRIPTION

The 's' designation in this variation on the 84V refers to it being surface mounted, with power supplies mounted remotely. This surface light has a 75mm (3") mounting plate designed for installation on walls.

A white glass bubble is captured inside a fine copper mesh basket and then plunged into hot clear glass. Air is blown into the matrix to gently push the white glass through the mesh, creating a delicate pillowed form that is suspended inside the thick outer layer of clear glass. Sometimes the copper mesh basket folds and crinkles, adding specificity to each piece.

NOTES

- + Purchase replacement lamps online at www.bocci.com/shop/bulbs
- + Please specify the colour temperature when ordering LED fixtures
- + Power supplies must be remote mounted
- + **The brass mounting base is untreated and, as such, will develop a natural patina over time.**

US Patent Pending
EU Patent # 003611144-0001 to 0004

Made in Vancouver, Canada

Vancouver
sales@bocci.com
www.bocci.com

Berlin
europa@bocci.com
www.bocci.com




SURFACE LIGHT

84Vs Brass

PRODUCT SPECIFICATION

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

BOCCI

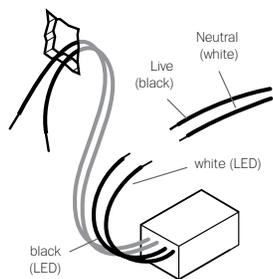


1

Mount power supply remotely and route output wiring from power supply to surface mounted light location.

Connect the black wire to live wire and white wire to neutral wire.


Note: Standard junction boxes are not compatible with the canopy. The surface mounted light base mounts directly to the wall. Power supplies must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

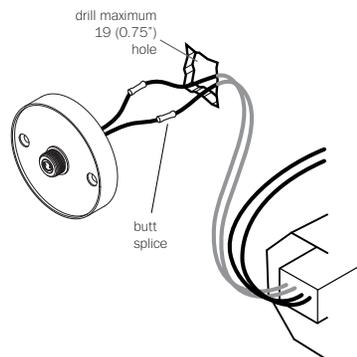

2

Drill a maximum 19mm (0.75") diameter hole.

Join power supply wiring to mounting base wiring using #16 butt splices, provided (stagger the splices).

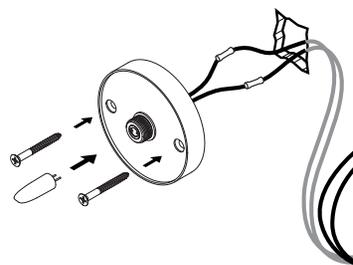


3

Tuck wiring into wall opening and affix the mounting base with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.


Turn power to fixture on.

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.

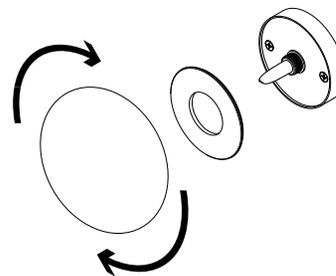

4

Place the plate adapter on the mounting base, and gently thread glass sconce on.

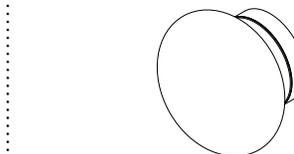

5

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

Vancouver
sales@bocci.com
www.bocci.com

Berlin
europe@bocci.com
www.bocci.com

US Patent Pending
EU Patent # 003611144-0001
to 0004

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE
E476186

SURFACE LIGHT

84Vs Brass

PRODUCT INSTALLATION INSTRUCTIONS

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

BOCCI