


—  
14 (0.6')



—  
56.8 (2.2')

—  
75 (3')

—  
±100-165 (4-6')

PENDANTS: one

MOUNTING: brass mounting plate 75mm (3") in diameter

LAMPING: 1.5w LED

INSTALLATION: threaded on - wall or ceiling mount

MATERIALS: blown and dipped glass, braided electrical components, silicon gasket, metal mounting plate

WEIGHT: approximately 1.5kg (3.4lb)

POWER SUPPLIES: remote mounted. Power supplies included

#### DESCRIPTION

The 's' designation in this variation on the 57 refers to it being surface mounted, with power supplies mounted remotely. This surface light has a 75mm (3") mounting plate designed for installation on walls.

57 is an exploration of a technique used for producing closed cell foam. The process involves trapping voids of air of different sizes and configurations within a glass matrix, yielding a shape loosely referencing a rain cloud. These pockets of air remain invisible when the piece is off, but come alive to reveal an interior universe when the piece is illuminated. By virtue of the fabrication process, each piece is completely unique.

#### NOTES

+ Purchase replacement lamps online at [www.bocci.com/shop/bulbs](http://www.bocci.com/shop/bulbs)

+ Power supplies must be remote mounted

+ **The brass mounting base is untreated and, as such, will develop a natural patina over time.**

US Patent # D796732

EU Design Patent # 002268581-0001 to 0006

Made in Vancouver, Canada

Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com

approx 1.5kg (3.4lb)




SURFACE LIGHT

# 57s Brass

PRODUCT SPECIFICATION

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: [info@bocci.com](mailto:info@bocci.com)

## BOCCI

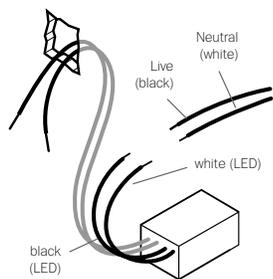


1

Mount power supply remotely and route output wiring from power supply to surface mounted light location.

Connect the black wire to live wire and white wire to neutral wire.


Note: Standard junction boxes are not compatible with the canopy. The surface mounted light base mounts directly to the wall. Power supplies must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

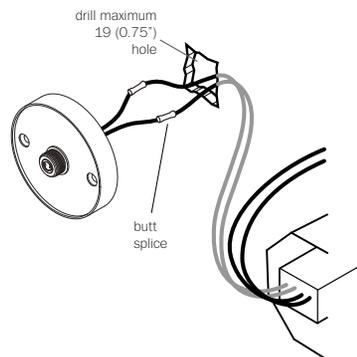

2

Drill a maximum 19mm (0.75") diameter hole.

Join power supply wiring to mounting base wiring using #16 butt splices, provided (stagger the splices).

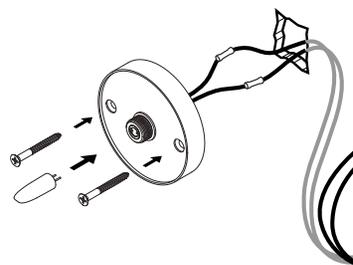


3

Tuck wiring into wall opening and affix the mounting base with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.

**Turn power to fixture on.**

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.

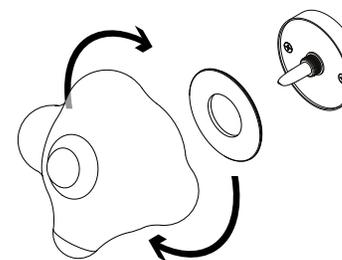

4

Place the plate adapter on the mounting base, and gently thread glass sconce on.

5

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com

US Patent # D796732  
EU Design Patent # 002268581-0001 to 0006

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE  
E476186

SURFACE LIGHT

57s Brass

PRODUCT INSTALLATION INSTRUCTIONS

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

**BOCCI**