


adjustable  
up to 3000  
(10')  
standard

adjustable  
up to 24600  
(80')  
custom



Ø152 (6')



±178-230  
(7'-9')

±165-203 (6.5'-8')

approx. 5kg (11lb)

PENDANTS: three

MOUNTING: brushed nickel canopy 152mm (6") in diameter x  
32mm (1.3") deep

LAMPING: 1.5w LED or 10w xenon

CABLE: adjustable. 3000mm (10') standard / up to 24600mm  
(80') maximum

MATERIALS: blown glass, braided metal coaxial cable, electrical  
components, swag hooks, aircraft cable, brushed nickel  
canopy

WEIGHT: approx. 5kg (11lb)

POWER SUPPLIES: integral. Power supplies included

## DESCRIPTION

73.3V is a cluster configuration of three 73V pendants hung from a round canopy. This fixture is designed to be horizontal, meaning that the pendants don't hang directly below, but instead trail off across a space, around a corner or simply deviate from their gravitational directive. As such, this fixture is designed to be hung from any number of optional swag points mounted elsewhere from the canopy.

The 73V is formed by blowing liquid glass into a folded and highly heat-resistant ceramic fabric vessel. The resulting shape has a formal and textural expression intuitively associated with fabric, which becomes permanent and rigid as it cools. Each 73V is completely unique in proportion, size and shape.

## NOTES

- + Purchase replacement lamps online at [www.bocci.com/shop/bulbs](http://www.bocci.com/shop/bulbs)
- + As an alternative to integral power supplies, Bocci recommends mounting power supplies remotely in an easily accessible and hidden location for ease of long-term maintenance.
- + Aircraft cable lengths are adjustable on site - 3000mm (10') is the standard maximum. Drop lengths specified in 3m/10' increments and are cut to length on site with steel cable cutters (cutters not supplied).

EU Patent # 006365441-0001-0004

Made in Vancouver, Canada

Vancouver  
sales@bocci.com  
www.bocci.com


Berlin  
europe@bocci.com  
www.bocci.com



CLUSTER

# 73.3V


Design by Omer Arbel  
PRODUCT SPECIFICATION

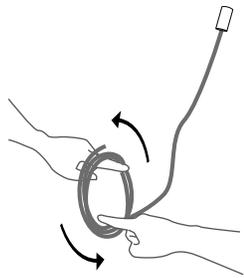

1


Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable.

Use patience: allow the cable to uncoil completely to avoid kinks.

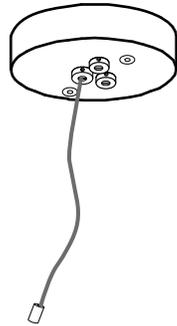

2

Determine the overall drop for the pendant fixture.

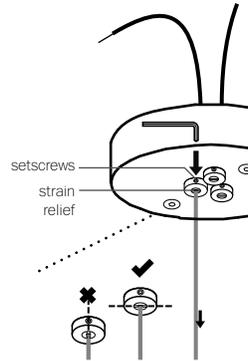

3


Thread the coaxial cables through the canopy, use a 2mm Allen key to loosen the setscrew in the canopy and gently feed the cable through until you have reached your desired drop length.

Use Allen key to tighten the setscrew to hold the strain relief and secure the coaxial cable at its new length. Perform a gentle tug test to ensure it is secure.

DO NOT OVERTIGHTEN.

Note: The strain relief is a black plastic collar around the coaxial cable. There is a single slot opening on the side of the strain relief component. It is essential that this opening is oriented at 90 degrees to set screw chamber. There can be no contact between the set screw and the cable.

RISK OF ELECTRIC SHORT!

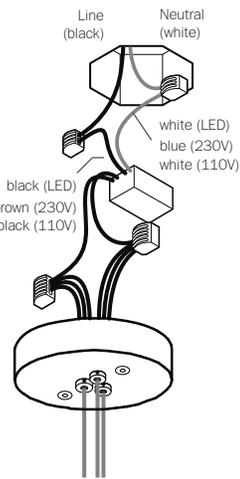

4


Xenon (110V) or LED: connect the black wire to black and white wire to white wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.

Connect the coaxial cable to the open slots in the terminal block on the 12V side of the power supplies.

Ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.

Once all coaxial connections are made, lift the fixture into position and connect the line voltage to the open slot in the appropriate terminal block.

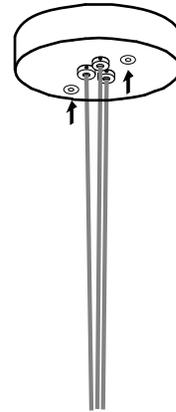


5

The client is responsible to ensure fasteners are attached to a robust structural substrate.

Tuck the power supply and wiring into the canopy. Line up the fastener holes or connect directly to structural ceiling surface using the fasteners provided.

Turn power to fixture on.

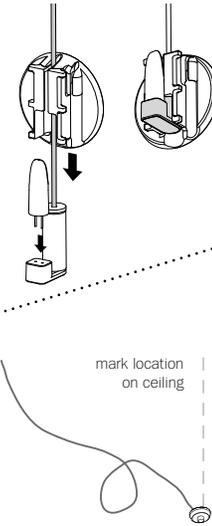


6

Plug the lamp into lamp socket. Check that each lamp is working properly as you go along.

Slide the slotted cap through the cable and push down to lock it in position.

Mark a point directly above the pendants desired location for the swag hook.

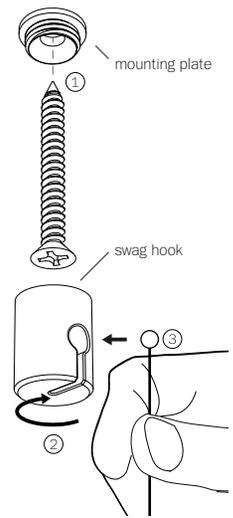

7

Ensure that the ceiling at the swag location is strong enough to hold 2kg (5lbs) before attaching swag hook with the provided screws.

Thread the swag hook on to the mounting plate, ensuring all the threads are engaged.

Slide the ball end of the aircraft into the slot on the swag hook.


CLUSTER

73.3V

Design by Omer Arbel  
PRODUCT INSTALLATION INSTRUCTIONS

© 2020, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

**BOCCI**

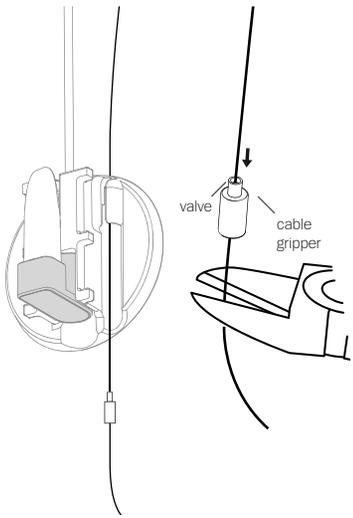


8

Push the valve on the cable gripper and adjust the position of the cable gripper so that the aircraft cable is roughly the same length as the coaxial cable.

Apply a load to the cable to ensure it is locked.


Using wire cutters, trim off any excess aircraft cable.

Feed the cable gripper through the slot next to the lamp socket.

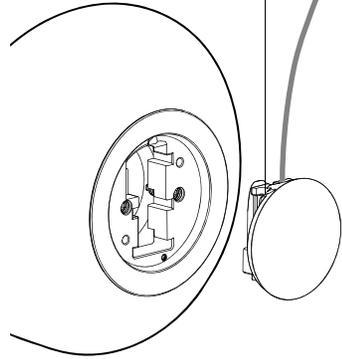


9

Attach the pendant to the cap through the slotted grooves.

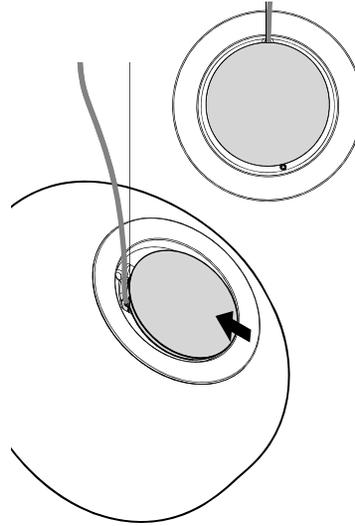


10

Slide the cap so the two circles are concentric.

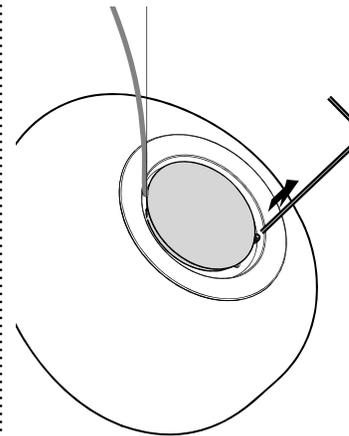

11

Partially unthread the exposed screw to lock the cap in position. DO NOT loosen the screw all the way.

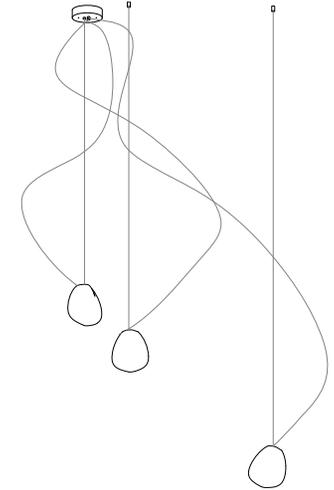

12

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com

EU Patent # 006365441-0001-0004

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE  
E476186

CLUSTER

73.3V

Design by Omer Arbel  
PRODUCT INSTALLATION INSTRUCTIONS

© 2020, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

**BOCCI**